


REV A ADDED MHESLS NOTE 12-08-04 GRH
 REV B ADDED MHESLM NOTE 12-08-04 GRH
 REV C ADDED NOTE FOR BP POSITION FOR A3R & A1K
 4-15-25 GRH

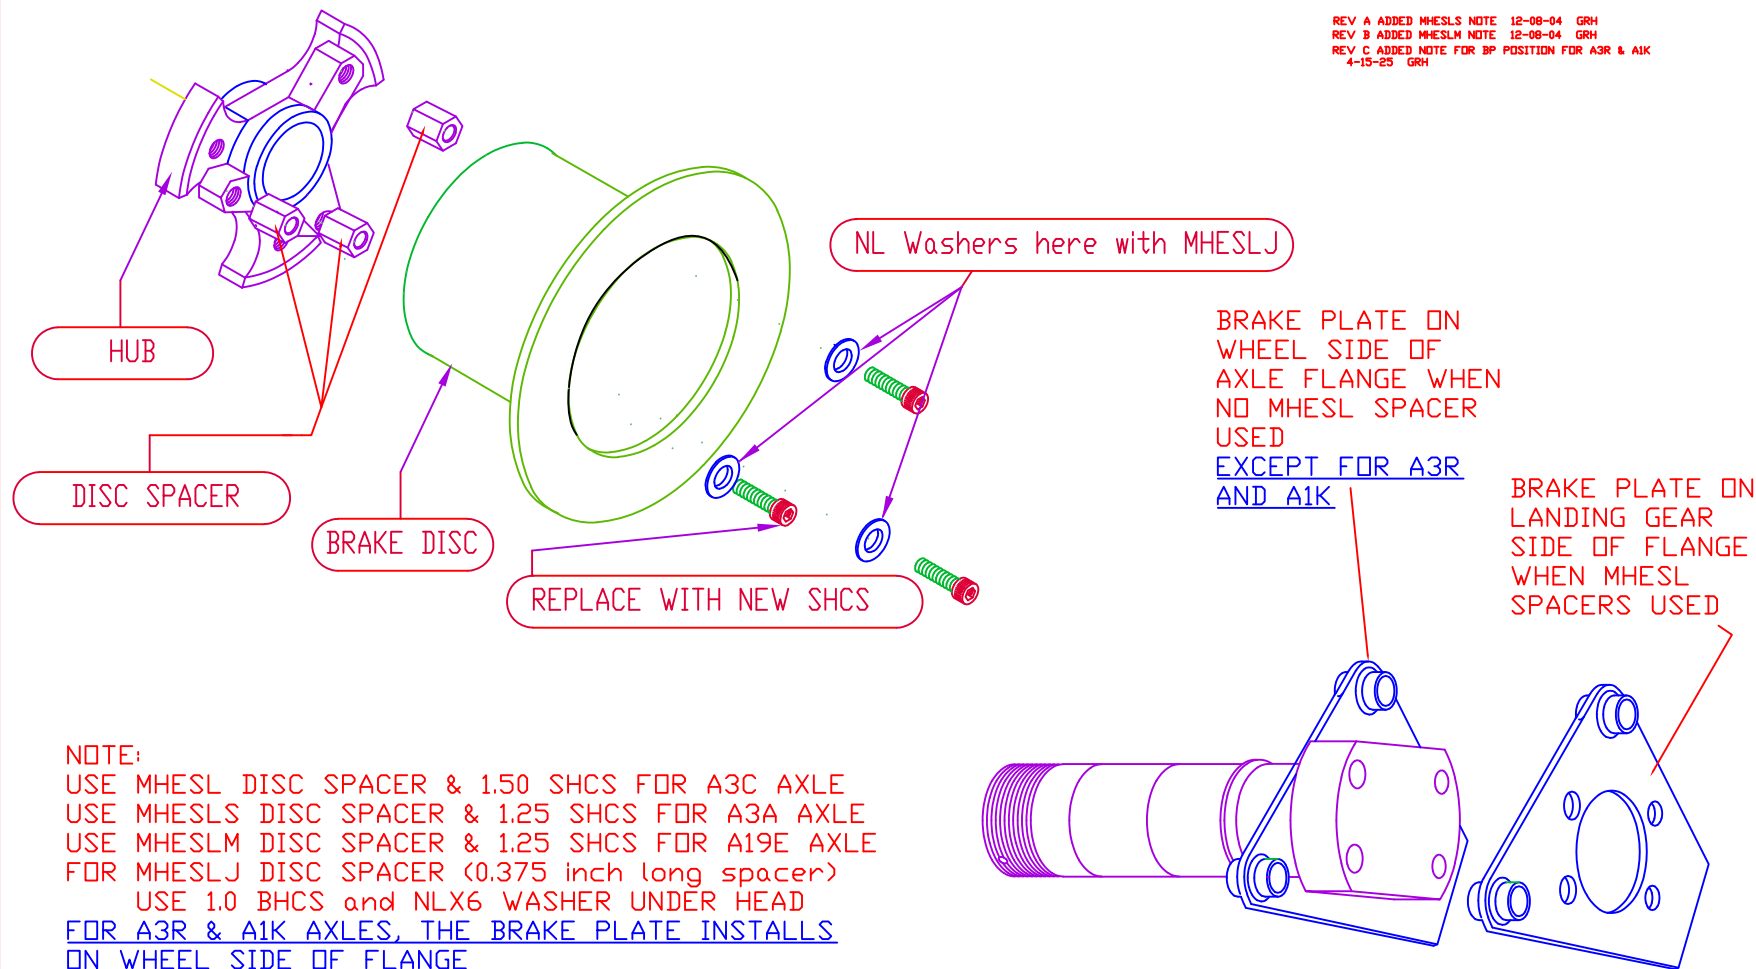

1. REMOVE 3 SHCS SECURING DISC TO HUB
2. INSERT SUPPLIED HEX SPACER BETWEEN HUB AND DISC
3. INSTALL NEW LONGER SHCS TO SECURE DISC TO HUB
4. TORQUE TO 100 IN-LB AND SECURE WITH LOCKWIRE
 FOR BHCS WITH NL WASHER NO LOCKWIRE IS REQUIRED
5. CALIPER BRAKE PLATE MUST NOW BE MOUNTED BETWEEN AXLE FLANGE AND LANDING GEAR TO PROVIDE INCREASED CALIPER SPACING FOR 8.00X6 TIRE

3D-MHE6B

MATCO mfg
 2361 S 1560 West
 WOODS CROSS, UT 84087 (801) 335-0582

MHESL SPACER INSTALLATION

DRAWN BY: G. HAPP
 AUTHORIZED BY:

SCALE: NONE
 DATE: APRIL 12, 2004

REVISION:
 C