
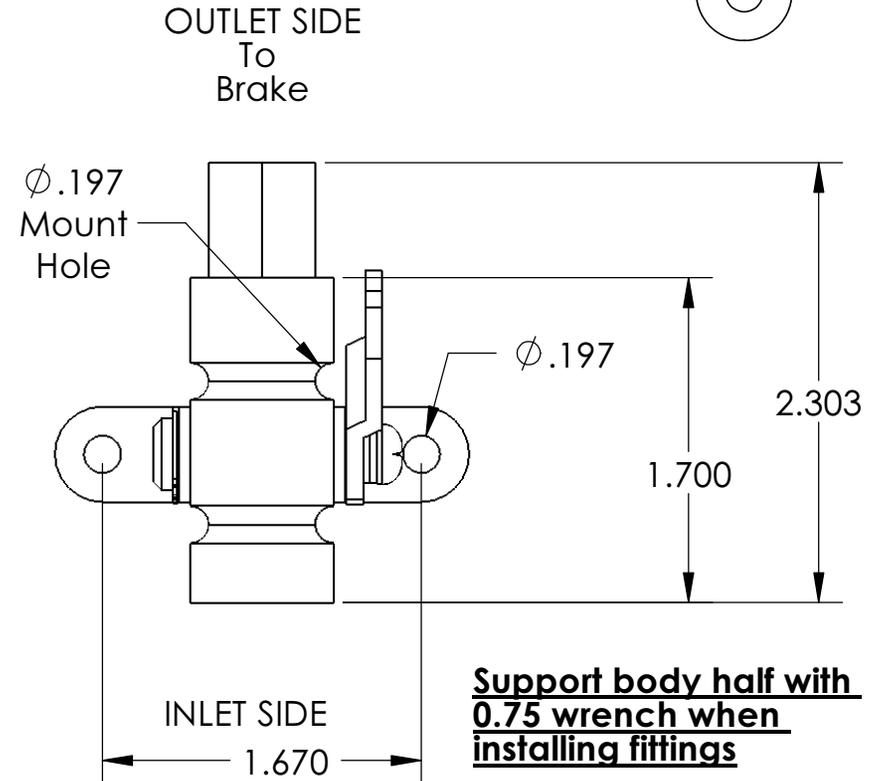
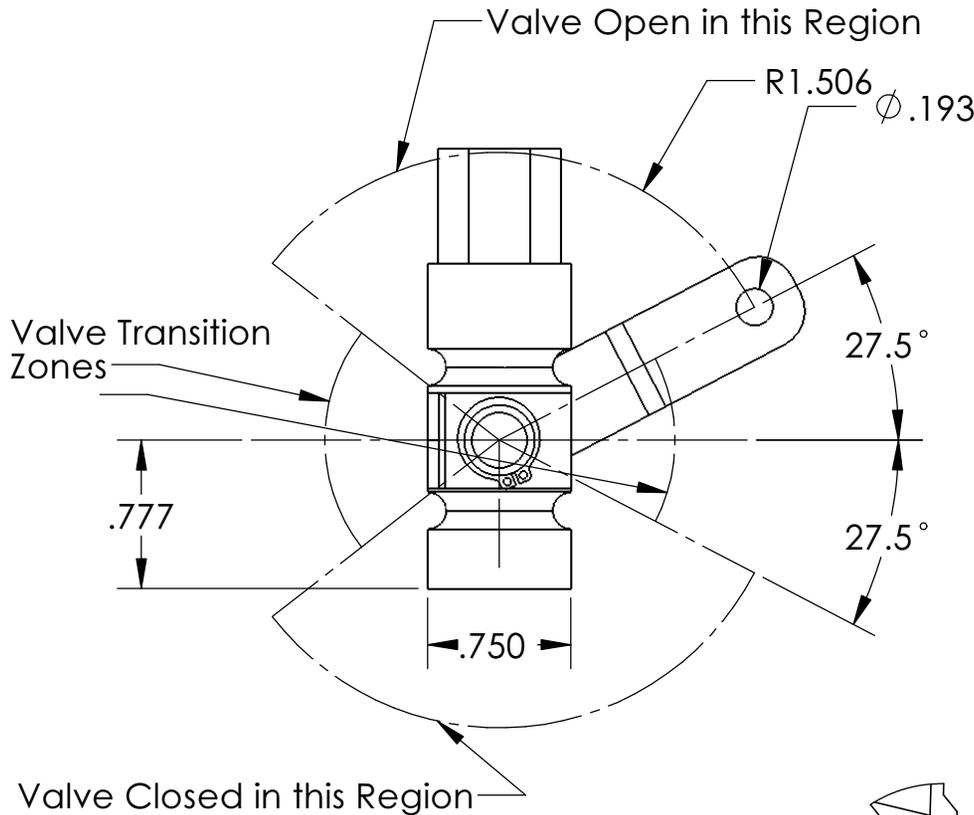


**For Use with Mil-H-5606
or Equivalent Fluid**


**Inlet and Outlet Port
Thread Size 1/8 NPT**

Alternate Mount
plate included with
valve for use in
flat mount in place
of 90 deg mount.



**Support body half with
0.75 wrench when
installing fittings**

CAM ORIENTATION NOTE: Lever can be moved to change Operating Zones in 90 deg increments. Default alignment as shown at right.

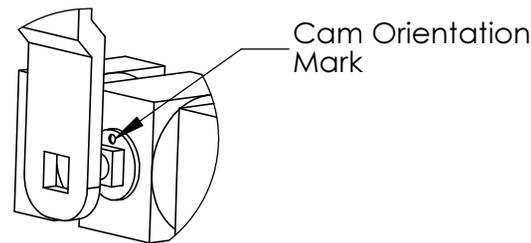

NEXT ASSY.	USED ON	QTY
APPLICATION		

MATCO mfg



2361 S. 1560 West
Woods Cross, Utah 84087 USA

NOMENCLATURE
VALVE, PARK

MATERIAL
VARIES

PART NUMBER
PVPV-S

DRAWING NO.
PARK/PVPV-S INSTALL

REVISION
NC

SCALE
1:1
Est Wt. (lb)
0.188

TOLERANCES
(EXCEPT AS NOTED)
DO NOT SCALE DRAWING
LINEAR .XX = + .03
.XXX = + .01
ANGULAR + 1/2
CONCENTRIC + .01

DRAWN BY
George R. Happ

FINISH

DATE
7/10/2008

CHECKED BY

SHEET 1 OF 1
SHEET SIZE A